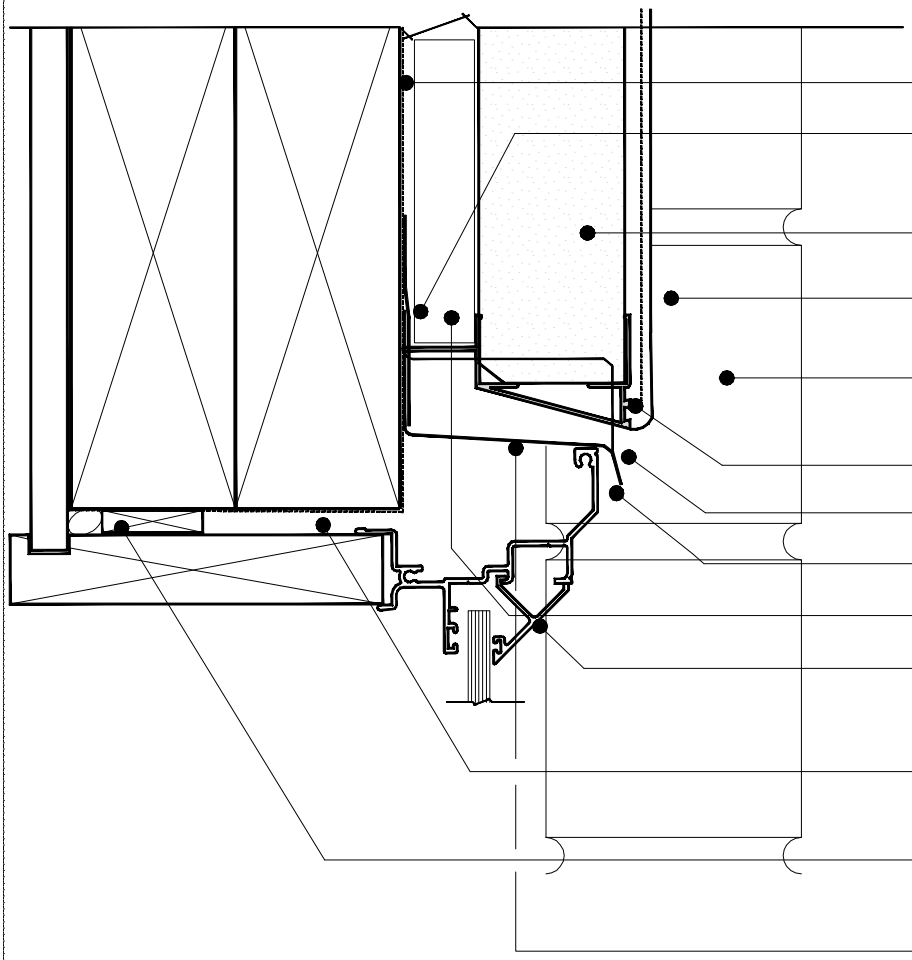

BREATHER TYPE BUILDING WRAP TAPED ONTO METAL HEAD FLASHING WITH WATERPROOF MEMBRANE BY BUILDER

60mm or 40mm GRAPHEX BOARD

SELECTED PLASTER FINISH

BRICK VENEER

PUNCHED PVC BASE BEAD

MINIMUM 5 mm GAP

10mm MIN COVER

CAVITY BATTEN

SELECTED ALUMINIUM JOINERY

BUILDING WRAP TO BE CONTINUED UNDER LINTEL AND TAPED AT CORNERS BY BUILDER

AIR SEAL TO BE INSTALLED BY BUILDER

METAL HEAD FLASHING WITH 15º SLOPE MUST HAVE FOLDED STOP ENDS EXTENDING VERTICALLY A MINIMUM OF 25mm AND HEAD FLASHING MUST BE SEALED AGAINST BRICK VENEER. SUPPLIED AND INSTALLED BY OTHERS

36 BRICK RECESSED JOINERY HEAD

PSL NUPLEX

OCTOBER 2009